


DIRECT STEAM KETTLES ON CABINET BASE

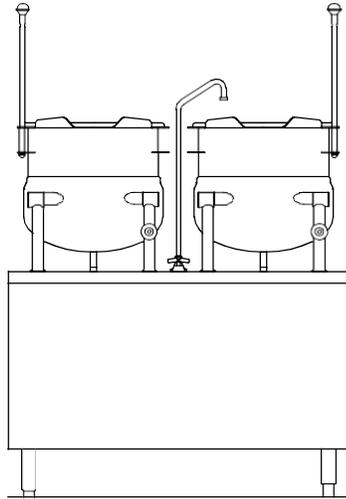

SPECIFICATIONS:

Shall be a Therma-Tek Model:

- TTDMT-10-10
- TTDMT-12-12

consisting of two direct connected steam tilting kettles mounted on a cabinet base of modular design to match other Therma-Tek steam equipment.

Each kettle shall be ASME code stamped and National Board registered. A double wall kettle interior shall form a steam jacket around the lower 2/3 of the kettle. The bottom of the kettle shall be of hemispherical design for superior heat circulation. The liner shall be of 316 stainless steel for high acid content products. The stainless steel mounting legs shall allow the kettle to be tilted forward past 90° for complete emptying and conceal the steam supply and condensate return connections, the right leg shall be fitted with a steam control valve. Each kettle shall be fitted with a tilt handle and heat resistant knob.

The cabinet shall be constructed with full perimeter painted angle frame, reinforced counter, #4 finish stainless steel exterior with removable side panels and hinged doors with magnetic latches, mounted on 6" (152 mm) stainless steel legs fitted with adjustable bullet feet on the front and flanged adjustable feet on the rear for securing to the floor, a hot and cold water faucet with control valves, 3" (76 mm) deep sinks with drain and splash guard. Concealed plumbing within the cabinet shall include a steam supply manifold with safety relief valve and a condensate return manifold and a steam trap for each kettle.

Model	CAPACITY	
TTDMT-10-10	2 x 10 gallon	2 x 38 liter
TTDMT-12-12	2 x 12 gallon	2 x 45 liter

OPERATION SHALL BE BY:

Direct steam at a minimum of 5 psi (34 kPa) and a maximum of 45 psi (310 kPa) 1/4 BHP required per kettle.

STANDARD FEATURES:

Type 316 stainless steel liners,
Steam control valves.

OPTIONAL ITEMS AT EXTRA COST:

Etched gallon markings.
Etched liter markings.
Correctional package.
Pressure reducing valve.
Stainless steel back panel.
Stainless steel cabinet frame.

ACCESSORIES:

One piece stainless steel lift off cover.
Lift-out perforated stainless steel basket.
Contoured graduated measuring strip.
Ball float trap.
Pour lip strainer.

