




## ELECTRIC COUNTER TILTING SKILLET

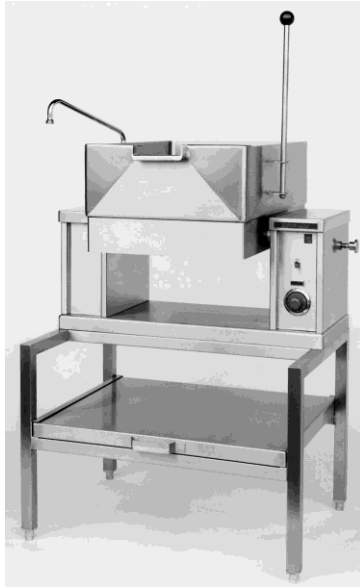

Show with optional stand and faucet.

### SPECIFICATIONS:

Shall be a Therma-Tek model TTECTS-12, electrically heated counter tilting skillet, c-CSA-us certified & NSF listed. The skillet shall have a one-piece covered corner, 10 gauge stainless steel pan with #4 finish exterior and polished interior. Heating shall be accomplished by electric elements cast embedded into a full 1-1/2" (38 mm) thick aluminum casting clamped to the underside of the pan for even heat distribution across the entire surface.

The skillet pan shall be mounted on side pivots to allow tilting for complete removal of contents by means of a tilting handle with heat proof knob. A tilt position device shall permit the pan to be tilted forward slightly during cooking to aid grease removal. The mounting base shall be fitted with mounting lugs for securing to counter or optional stand. The controls shall be integrally mounted in the stainless steel clad console and shall include a power switch, operating thermostat, pilot light and high temperature cut-off.

The skillet shall operate in a temperature range of 160°F to 445°F (71°C to 230°C).

Model	Capacities		
	kW	US Gal.	liters
TTECTS-12	9	12	45

### OPERATION SHALL BE BY:

Electric heating elements equipped for operation on:

- 208 VAC, 1 phase, 50/60 Hz.
- 208 VAC, 3 phase, 50/60 Hz.
- 220 VAC, 1 phase, 50/60 Hz.
- 220 VAC, 3 phase, 50/60 Hz.
- 240 VAC, 1 phase, 50/60 Hz.
- 240 VAC, 3 phase, 50/60 Hz.
- 415/240 VAC, 3 phase, 4 wire, 50/60 Hz.
- 380/220 VAC, 3 phase, 4 wire, 50/60 Hz.

### OPTIONS AT EXTRA COST:

- 380 VAC, 3 phase, 50/60 Hz.
- 415 VAC, 3 phase, 50/60 Hz.
- 480 VAC, 3 phase, 50/60 Hz.
- 600 VAC, 3 phase, 50/60 Hz.
- Etched gallon markings (GMS-12).
- Etched litre markings (LMS-45).
- Marine Lock.
- Correctional package.

### ACCESSORIES:

- Steam pan insert (SPI-12).
- One piece lift-off stainless steel cover (SC-12).
- Pour strainer (PS-12).
- 21" (530mm) high floor stand c/w sliding shelf (S-30).
- 21" (530mm) high floor stand c/w sliding drain pan and stationary drain (SD-30).
- Single pantry faucet with 12" swing spout (SF-12).
- Double pantry faucet with 12" swing spout (DF-12).
- Single pantry faucet & bracket with 60" pot filler (SF-60).
- Double pantry faucet & bracket with 60" pot filler (DF-60).
- Pour Strainer (PS-12)

### SERVICE CONNECTIONS

⚡ Electrical connection to be as specified on data plate.

### ELECTRICAL CHARACTERISTICS

MODEL	kW	PHASE	AMPS PER LINE						
			208V	220V	240V	380V	415V	480V	600V
TTECTS-12	9.0	1	43.3	40.9	37.5	N/A	N/A	N/A	N/A
		3	25.0	23.6	21.7	13.7	12.5	10.8	8.7

### DIMENSIONS

MODEL	CAPACITY	UNITS	A	B	C	D	E	F	G	H	J	K	L	M	N
TTECTS-12	12 gallons	inches	29	16.75	4	2	24	25.75	5.5	12.5	20	13	10.5	33.25	7
	46litres	mm	737	425	102	51	610	654	140	318	508	330	267	845	178

